

ROLLER GUIDE ASSEMBLY 3-1/4"



DELCO PART# C-08-0810

- Suitable for Counterweight
- Capacity: Recommended for 5,500lbs (2,500kg)
- Weight: 5.5lbs (2.5kg)
- Roller: Aluminum Frame with Urethane Tire
- Compatible with ElSCO Model D Type Roller Guide Assembly
- Speed: Up to 2m/s (400fpm)

ROLLER GUIDE ASSEMBLY 3-1/4" HIGH SPEED

DELCO PART# C-08-0807


- Spring Loaded with Stop Kit
- Steel Frame and Steel Arms
- Speed: 2.5m/s to 3.5 m/s (500fpm to 700fpm)
- Capacity Load: 5,900lbs (2,700kg)
- Guide Rail Width: 10mm to 16mm

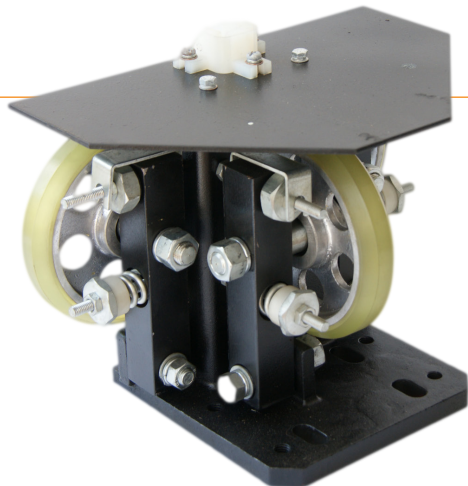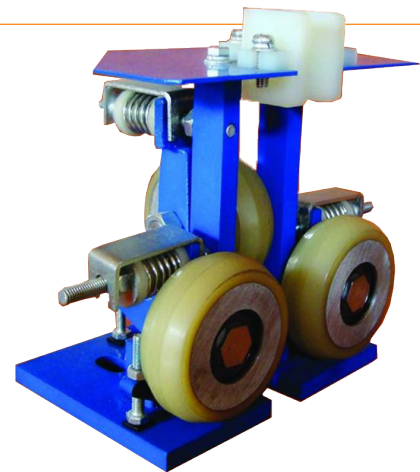

ROLLER GUIDE ASSEMBLY 6"

DELCO PART# C-08-0804

- Spring Loaded
- Steel Frame and Steel Arms
- Speed: Up to 3.5m/s (700fpm)
- Capacity Load: 5,950lbs (2,700kg)
- Guide Rail Width: 10mm, 16mm
- Weight: 37.5lbs (17kg)

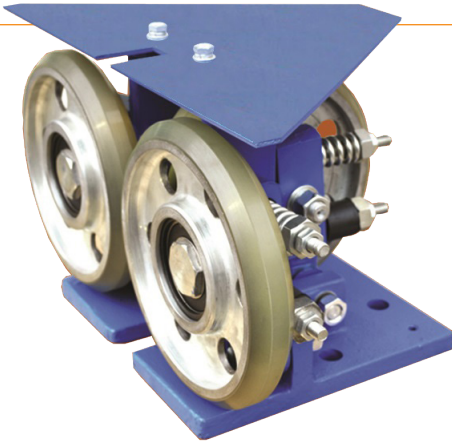

ROLLER GUIDE ASSEMBLY 7-7/8" HIGH SPEED

DELCO PART# C-08-0808

- Spring Loaded with Stop Kit
- Capacity: 5,900lbs (2,700kg)
- Speed: Up to 4m/s (750fpm)
- Guide Rail Width: 10mm to 16mm
- Compatible with Unitec Model F6261C

ROLLER GUIDE ASSEMBLY 10"

DELCO PART# C-08-0803

- Spring Loaded for High Speed Applications
- Capacity: 4,400lbs (2,000kg)
- Speed: Up to 6m/s (1,200 fpm)
- Size: 20-7/8"(L) x 11-3/4"(W) x 15-3/8"(H)
(530mm x 300mm x 390mm)
- Weight: 77lbs (35kg)
- Roller: Cr. Plated Aluminum Frame and Aluminum Arms

